


DPV.WT-PN16

PERFORMANCE STANDARD

CLASS	PN16
SHELL TEST	MSS SP-82
SEAL TEST	MSS SP-82
AIR TEST	--

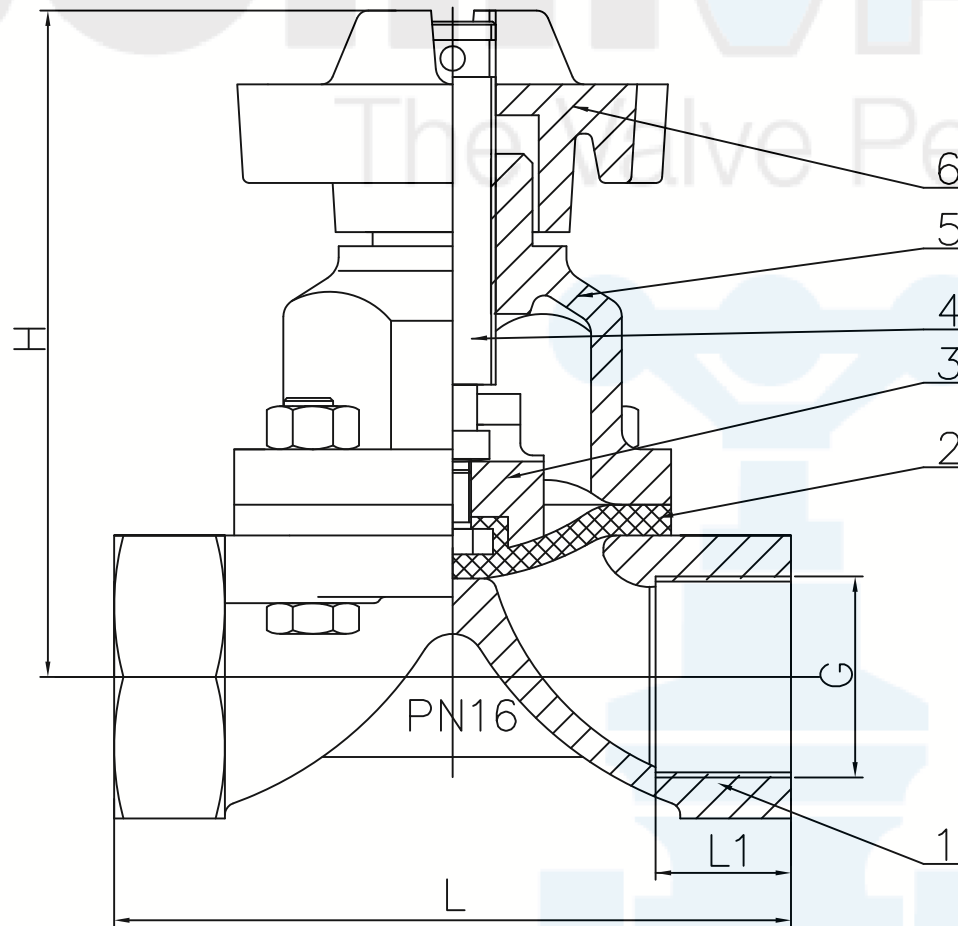

TECHNICAL REQUIREMENTS	
1.	DESIGN & MANUFACTURE CONFORM WITH BS5156
2.	TEST & INSPECT CONFORM WITH MSS SP-82
3.	FACE TO FACE DIMENSION CONFORM WITH BS5156
4.	END DIMENSION CONFORM WITH BSP
5.	ALL DIMENSION IN MM UNLESS OTHERWISE SPECIFIED

DN	L	G	L1	H (H-OPEN)
DN15	67	G1/2"	8	84(92)
DN20	90	G3/4"	12	93(103)
DN25	90	G1"	18	106(120)
DN32	120	G1 1/4"	18	137(156)
DN40	160	G1 1/2"	18	142(163)
DN50	190	G2"	20	167(192)

6	HANDWHEEL	ALUMINIUM
5	BONNET	GG25 CAST IRON
4	STEM	2Cr13
3	DISC	GG25 CAST IRON
2	DIAPHRAGM	NATURAL RUBBER
1	BODY	GG25 CAST IRON
No.	PART NAME	MATERIAL

JOHN VALVES Fig.3001

		Drawing	Fig. 3001
			DATE: 2022-06-13
Design		THREADED DIAPHRAGM	DPV.WT-PN16
Date			